W 83177C25-GT

D25″ H34″ L6

We are dedicated to providing the finest quality crystal chandelier for our customers. Our master craftsmen and designer pride themselves on their attention to detail. prompt,efficient service is our priority.
Enclosed,are detailed instructions on how to properly install your chandelier.Please read all instructions carefully and thoroughly.If you have any questions please fell free to call our toll free CHANDELIER HOTLINE AT:

1-855-411-8999

WARNING!!!

CONTENTS ARE FRAGILE
HANDLE WITH CARE

The metal frame and crystal components of this chandelier are very delicate. Please excersise extreme Caution during unpacking and installation.

WARNING!!!

After passing the main eiectrical wire through the 10mm pipe and connecting the pipe to the main body top connector, place all remaining pieces as shown in nurmerical order and in the orientation depicted. Refer to the parts list to avoid confusion between parts. The part Numbers coincide

CAUTION

1. Rated 110v-130v/60Hz, bulb E12/40W maximum.
2. Care Should be taken to avoid damage to the surface of lighting and wire, wearing gloves is recommended when installing
3. Connect black or red wire of the lighting to live wire and white or blue wire to neutral wire and double colored(or bare copper)wire to ground wire.
4. Never install lighting on damp ceiling, the room should be dry and well ventilated.
5. Keep lighting away from acid, alkali and other corrosive chemical or gas, clean the lighting with Clean soft cloth only.
6. Installation must be carried out by qualified electrician only.
7. Disconnect the power before installing, Ceaning and replacing lighting.
8. Never cover the lighting when power is connected.
9. Firmness must be secured when installing ceiling tube、chain、pipe and other connecting parts.
10. Care should be taken to avoid damage when installing glass parts.
11. All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes. Make sure that the elecrtrical supply to the chandellier is turned off at the main fuse or circuit breaker before doing any installation Worldwide lighting shall not be responsible for unprofessional wiring.

Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

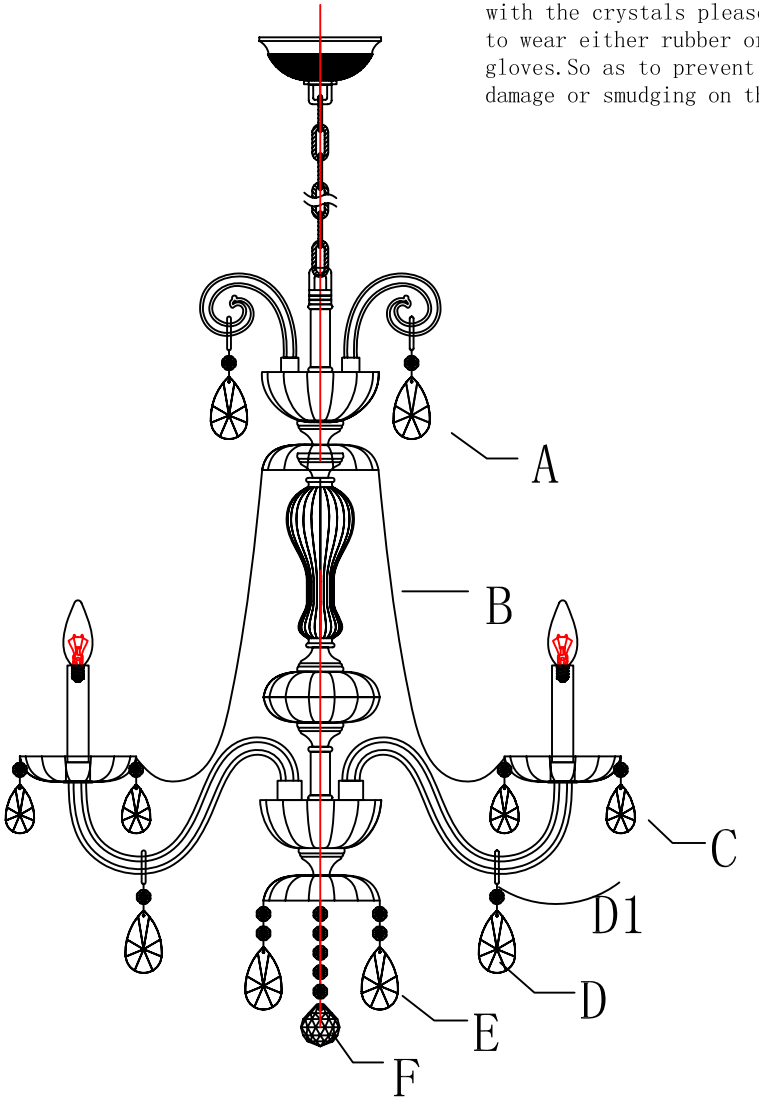

Crystal Dressing Instructions

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

A



14mmX1

2.5″

B



14mmX21

C

14mmX1

2″

D



14mmX1

2.5″

D1



14mmX10

E

14mmX2

2″

F

14mmX5

40mmX1

09

NO.	Quantity
A	6 strings
B	6 strings
C	24strings
D	6strings
D1	6 strings
E	6 strings
F	1 string

CANOPY PARTS LIST

Existing Electrical Box



Crossbar Screws



Crossbar Screws x 2(not srpplied)

Canopy



Glass Saucer



Chains

Wire Connector

Shrinkable tube



Cable tie



Ground Wire

02

Frame Assembly Diagram

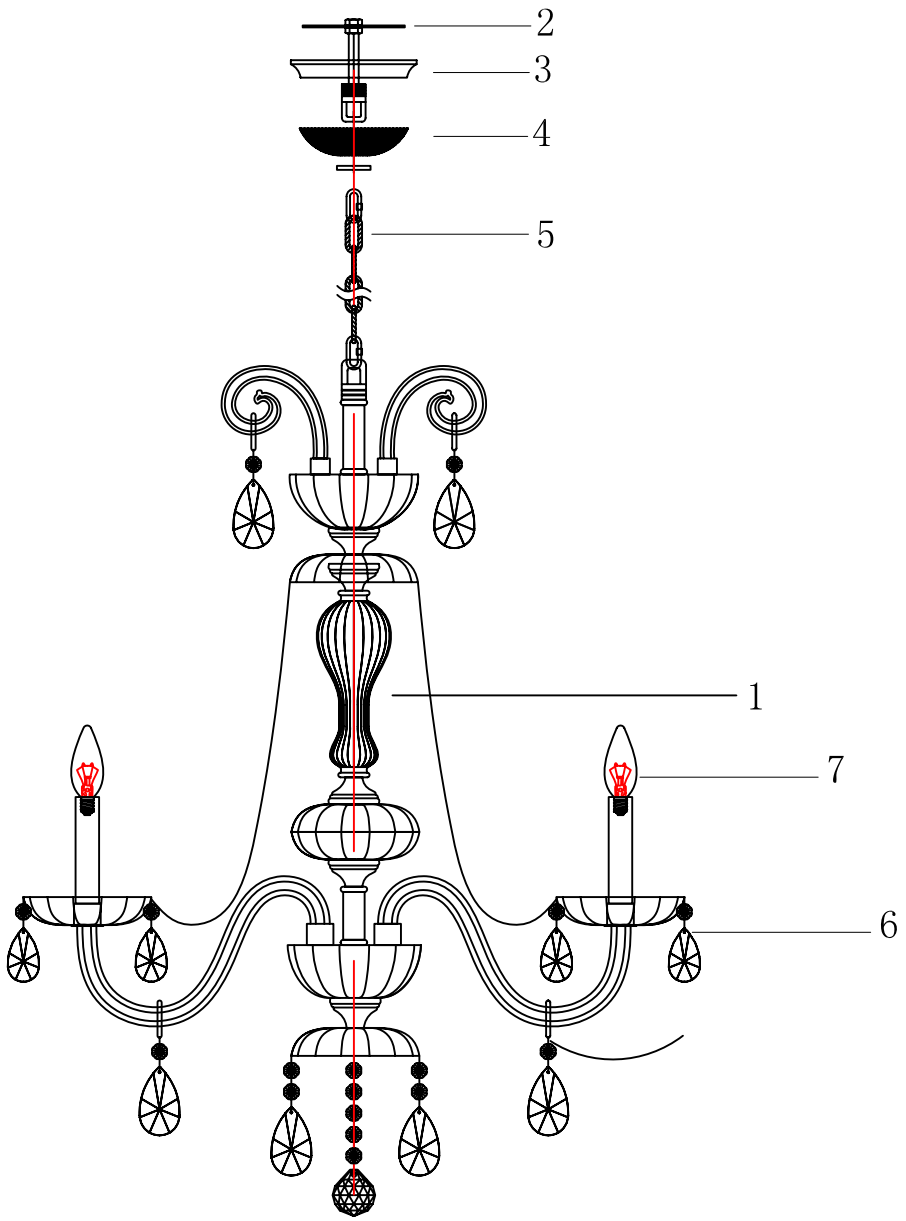

CANOPY INSTALLATION INSTRUCTIONS

2. MAKE SURE POWER IS DISCONNECTED!!
3. Attach washer to supporting member in ceiling sufficient to support weight of fixture.
4. Slip screw collar, prismatic cover and metal canopy over chain. Determine the suspension length of the fixture and cut chain, if necessary. Use two connecting links to attach chain to chandelier loop and ceiling loop.
5. Insert stem wire through chain and ceiling loop. Connect wires. Fixture MUST be grounded.
6. Check distance from ceiling to loop to assure canopy assembly will be flush against ceiling.
7. Attach canopy to ceiling with screw collar.

CANOPY INSTALLATION DIAGRAM

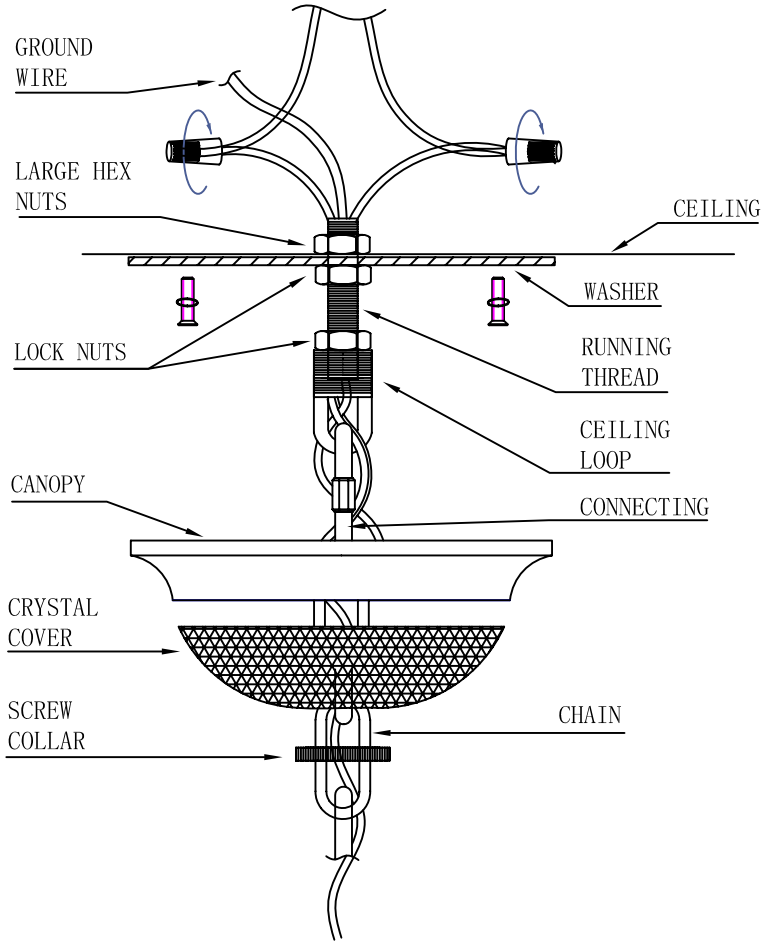

Frame Assembly Instructions

8. Install scrolls into washer with screws provided. Install arms into large arm washer. Line up holes in arms with dimple in washer. Use lock washer and nut to secure arms in place. Connect bare ground wires in each arm to bare ground wire in center column. Use electrical tape to secure wire nuts, NO MORE THAN 5 - WIRESPER WIRE NUT . Sufficient quantities of jumper wires and wire nuts are provided.
9. Connect white arm wires to neutral column wire(ribbed or marked is neutral). Connect black arm wires to power wire in column. Carefully press wires as cloes as possible to the underside of washer.
10. Attach light assembly with lock washer and coupling with pipe. Install 5 - C7 bulbs. Attach glass assembly with rosette and round nut.
11. Install bobeches and bulbs, connect power and test the fixture BEFORE trimming. If any of the bulbs do NOT light - DISCONNECT POWER. Double check the wire connections.

The end!

WARNING!!!

CONTENTS ARE FRAGILE
HANDLE WITH CARE

The metal frame and crystal components of this chandelier are very delicate. Please excersise extreme Caution during unpacking and installation.

WARNING!!!

After passing the main eiectrical wire through the 10mm pipe and connecting the pipe to the main body top connector, place all remaining pieces as shown in nurmerical order and in the orientation depicted. Refer to the parts list to avoid confusion between parts. The part Numbers coincide

CAUTION

1. Rated 110v-130v/60Hz, bulb E12/40W maximum.
2. Care Should be taken to avoid damage to the surface of lighting and wire, wearing gloves is recommended when installing
3. Connect black or red wire of the lighting to live wire and white or blue wire to neutral wire and double colored(or bare copper)wire to ground wire.
4. Never install lighting on damp ceiling, the room should be dry and well ventilated.
5. Keep lighting away from acid, alkali and other corrosive chemical or gas, clean the lighting with Clean soft cloth only.
6. Installation must be carried out by qualified electrician only.
7. Disconnect the power before installing, Ceaning and replacing lighting.
8. Never cover the lighting when power is connected.
9. Firmness must be secured when installing ceiling tube、chain、pipe and other connecting parts.
10. Care should be taken to avoid damage when installing glass parts.
11. All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes. Make sure that the elecrtrical supply to the chandellier is turned off at the main fuse or circuit breaker before doing any installation World wide lighting shall not be responsible for unprofessional wiring.

Installation:
Please read all instructions carefully.
Before you proceed to install, make sure.
that the power supply is turned off and
remains off until installation is complete.
please note that each part has been assigned a number.
please proceed in a numerical order.